


EI66 Laminated transformers 36.0VA Series


Low Frequency, Open-Style Laminated, Split Bobbin, Horizontal Plug-In Series

Features


- ✧ High (2500V) isolation; 2500VRMS HIPOT
- ✧ Non-concentric design - eliminates ESS
- ✧ No crossover between primary/secondary winding leads
- ✧ Vacuum impregnated - withstands board washing systems and reduces audible noise
- ✧ Baked resin provides an environmentally-resistant finish
- ✧ Rugged construction - no additional mounting hardware
- ✧ Universal design, fits industry-standard footprints
- ✧ Available in single or dual primary

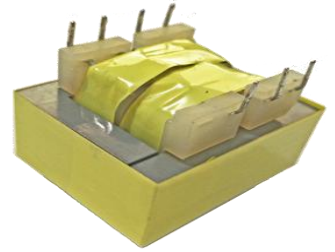

Mechanical:mm

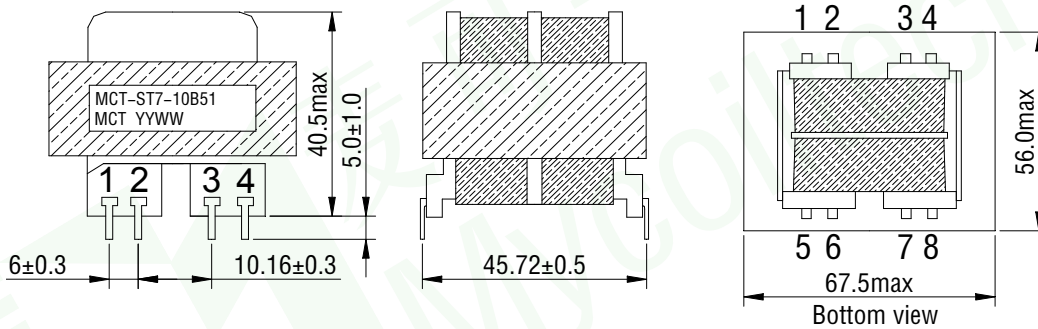

Schematics

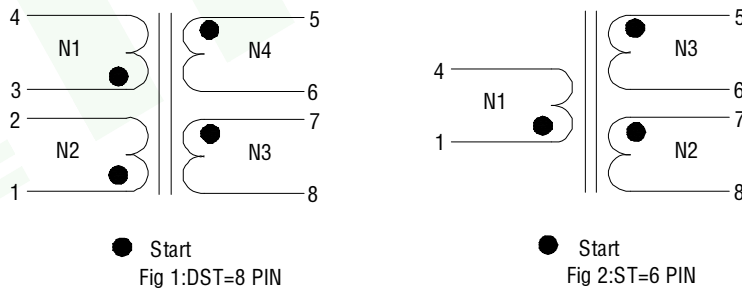

MCT Part No. 115V-6Pin	MCT Part No. 115V/230V-8Pin	Secondary RMS Rating	
		Series	Parallel
MCT-ST7-10B51	MCT-DST7-10B51	10V C.T. @ 3.6A	5V @ 7.2A
MCT-ST7-12B52	MCT-DST7-12B52	12.6V C.T. @ 2.85A	6.3V @ 5.7A
MCT-ST7-16B53	MCT-DST7-16B53	16V C.T. @ 2.25A	8V @ 4.5A
MCT-ST7-20B54	MCT-DST7-20B54	20V C.T. @ 1.8A	10V @ 3.6A
MCT-ST7-24B55	MCT-DST7-24B55	24V C.T. @ 1.5A	12V @ 3.0A
MCT-ST7-28B56	MCT-DST7-28B56	28V C.T. @ 1.3A	14V @ 2.6A
MCT-ST7-36B57	MCT-DST7-36B57	36V C.T. @ 1.0A	18V @ 2.0A
MCT-ST7-48B58	MCT-DST7-48B58	48V C.T. @ 0.75A	24V @ 1.5A
MCT-ST7-56B59	MCT-DST7-56B59	56V C.T. @ 0.65A	28V @ 1.3A
MCT-ST7-120B60	MCT-DST7-120B60	120V C.T. @ 0.3A	60V @ 0.6A